

# EPOXY RESIN 51-FLOORING

## Two component Self Leveling Epoxy Flooring Resin

### DESCRIPTION

**EPOXY RESIN 51-FLOORING** is a two component, self-leveling, solvent free, epoxy-based floor coating with excellent chemical resistance, high impact and abrasion resistance.

### COMPLIANCE – CERTIFICATION

**CE** certified acc. EN 13813

### APPLICATIONS

- Industrial Floors
- Hospitals
- Food, Chemical and Pharmaceutical Industries
- Indoor Car Parks
- Retail Shopping Areas
- Hotels

### FEATURES & BENEFITS

- Solvent free
- High impact resistance
- Excellent chemical resistance
- Excellent mechanical properties, high tensile and tear strength, abrasion resistance.
- Inhibits fungal and bacterial growth

### APPLICATION

#### Concrete substrate conditions (standard):

- Hardness:  $R_{28} = 15\text{MPa}$
- Humidity:  $W < 5\%$
- Temperature: from  $12\text{ °C}$  -  $35\text{ °C}$
- Relative humidity:  $< 85\%$

Clean the surface thoroughly, mechanical grinding is highly recommended. Remove oil, grease and wax contaminants. Cement laitance, loose particles, mold release agents, curing membranes must be removed. Fill surface irregularities with **EPOXY RESIN -21 T**.

### MIXING:

Before mixing component A+B, mix component A thoroughly. Pour Component B into the Component A pail and mix using a low speed (300 rpm) electric drill until mixture is completely homogenous. Pay particular attention to the wall lining and bottom of the pail.

### PRIMING:

Prime all surfaces with **AQUADUR** or **AQUASMART-DUR** at a consumption of 150-200 gr/m<sup>2</sup>. Optionally sprinkle dry quartz sand on wet primer and blow off excess sand. Allow 12 hours and apply **EPOXY RESIN 51-FLOORING**.

### APPLICATION AS PAINT:

Apply **EPOXY RESIN 51-FLOORING** A+B without addition of quartz sand with a roller or spatula in two coats with 0.250-0.350 Kg/m<sup>2</sup> per coat (minimum total consumption 0.5 Kg/m<sup>2</sup>). To make an anti-slip finish the final layer is broadcasted with silica sand or corundum.

### APPLICATION AS SELF-LEVELING:

To the mixture of **EPOXY RESIN 51-FLOORING** A+B, add 1:1 by weight dry silica sand 0.1-0.3 diameter. Pour the material on the floor and apply by 5mm notched trowel. Use a spiked roller to subsequently remove entrapped air.

### PACKAGING

5Kg + 1Kg Pails

### SHELF LIFE

**EPOXY RESIN 51-FLOORING** can be kept for minimum 12 months in the original unopened pails at a temperature of  $5\text{ °C}$  -  $25\text{ °C}$  in dry places.

# EPOXY RESIN 51-FLOORING

## TECHNICAL SPECIFICATIONS

### The Liquid product:

| PROPERTY                         | UNITS | METHOD                 | SPECIFICATION |
|----------------------------------|-------|------------------------|---------------|
| -Pot Life (25°C) & 55% RH        | Min.  | Internal Method        | >40           |
| -Mixing Ratio<br>(Comp.A:Comp.B) | -     | -                      | 5:1           |
| -Viscosity (initial mixing)      | cP    | ASTM D2196-86, at 25°C | 2,000-4,000   |


### The Coating:

| PROPERTY                                           | UNITS             | METHOD                                         | SPECIFICATION |
|----------------------------------------------------|-------------------|------------------------------------------------|---------------|
| -Hardness                                          | Shore A           | ASTM D2240 / DIN 53505 / ISO R868              | >95           |
| -Max Temperature short<br>time (shock)             | °C                | -                                              | 150           |
| - Light Traffic ((25°C) &<br>55% RH)               | Hours             | INTERNAL                                       | 24            |
| - Heavy Traffic                                    | Days              | INTERNAL                                       | 7             |
| - Abrasion Resistance<br>(TABER)                   | Mg loss           | ASTM D6040, CS17 WHEELS, 1000<br>REVS, 1000 GR | 55            |
| - Adhesion to Concrete                             | N/mm <sup>2</sup> | ASTM D4541                                     | >3            |
| - Compression Strength                             | N/mm <sup>2</sup> | DIN EN 196-1                                   | >50           |
| - Shrinkage                                        | %                 | INTERNAL                                       | 0             |
| -Resistance to acids,<br>solvents, lubricants etc. | -                 | INTERNAL                                       | Excellent     |

## EPOXY RESIN 51-FLOORING

| ESSENTIAL CHARACTERISTICS                      | PERFORMANCE                                              | TEST STANDARD   | HARMONISED TECHNICAL SPECIFICATION |
|------------------------------------------------|----------------------------------------------------------|-----------------|------------------------------------|
| ABRASION RESISTANCE                            | 55 mg loss<br>(c17s/1000/1000)                           | ASTM D6040      | EN 13813                           |
| REACTION TO FIRE                               | CLASS F                                                  | EN 13813        |                                    |
| AGGRESSIVE SUBSTANCES                          | NO                                                       | EN 13813        |                                    |
| CAPILLARY ABSORPTION AND PERMEABILITY TO WATER | $W=0.02 \text{ Kg}/\{\text{m}^2 \times \text{h}^{0,5}\}$ | EN 1062-3       |                                    |
| ADHESION STRENGTH BY PULL OFF TEST             | $>3,5 \text{ N/mm}^2$                                    | EN 13892-8:2002 |                                    |

NONE OF OUR PUBLISHED INSTRUCTIONS AND SPECIFICATIONS, IN WRITING OR OTHERWISE, ARE BINDING EITHER IN GENERAL OR WITH RESPECT TO ANY THIRD PARTY RIGHTS, OR DO THEY RELIEVE INTERESTED PARTIES OF THEIR DUTY TO SUBJECT THE PRODUCT TO AN ADEQUATE EXAMINATION OF ITS SUITABILITY. IN NO EVENT WILL ALCHIMICA S.A. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE, WHATSOEVER, RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS. ALCHIMICA S.A. RESERVES THE RIGHT TO CHANGE AT ANY TIME THE PROPERTIES OF ITS PRODUCTS. PLEASE REFER TO THE CURRENT VERSION OF THE TECHNICAL DATA SHEET, AVAILABLE FROM OUR WEB SITE [WWW.ALCHIMICA.COM](http://WWW.ALCHIMICA.COM)

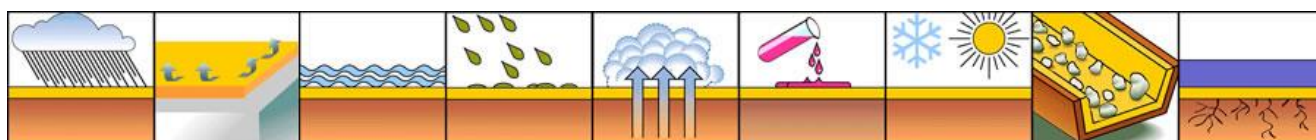

Certified quality, environmental and occupational health & safety management systems:  
ISO 9001/14001 & ISO 45001.

EPOXY RESIN 51-FLOORING/EE/19-03-2020